




MAL500-2D

Micro-Adjustable Torque Screwdriver 40 cN.m-200 cN.m







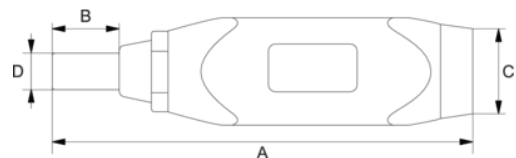

PRODUCT DETAILS

- ESD safe (IEC 61340-5-1)
- Torque limiting clutch prevents over application of force to fastener
- 1/4" Hexagon anti-magnetic spring loaded bit holder to avoid ESD damage to sensitive equipment or components in electronic applications
- Adjustable Torque Screwdriver, with all metal 3-lobe shaped handle
- Powder coat wrinkle finish provides positive grip
- Cam-over torque limiting clutch for repeatability
- Store driver in the protective case at lowest torque setting
- Accuracy meets or exceeds +/-6% over recommended usage period: 5,000 cycles or one year, whichever occurs first
- Clockwise torque measurement only. It can be used to loosen fasteners without affecting the internal mechanism
- Cam-Over technology provides tactile and audible feedback when torque values are reached
- Supplied with an internal declaration of conformity in compliance with International standards.
- Standard adjustable drivers include window with single scale in cNm
- ISO 6789, ISO 1174, ASME B107.300-2010
- Made in USA



PRODUCT ATTRIBUTES

Product: **MAL500-2D**

	40-200 cNM				3-15 lb·in
	1/4 in		2 cNM	A	157 mm
A	6.18 in	B	18,2 mm	B	0,72 in
C	28 mm	C	1.10 in	D	9,6 mm
D	0,38 in		0.26 kg		