




### Features:

- **International Style:** 2A
- **Handle Material:** Stainless Steel
  - **Magnetic Properties:** Anti-Magnetic
  - **Corrosion Resistance:** Anti-Acid
  - **Finish:** Polished
- **Tips:** Replaceable Carbon Fiber, Taper, Blunt
  - **Material:** Polyamide 66 with carbon fiber, Black
  - **Resistance:**
    - Tip to Tip: <math> < 1 \times 10^4 </math> ohms tested per ANSI/ESD STM11.12
- Made in Switzerland

### Replacement Tips Item: [2A-CB-SA-RT](#)

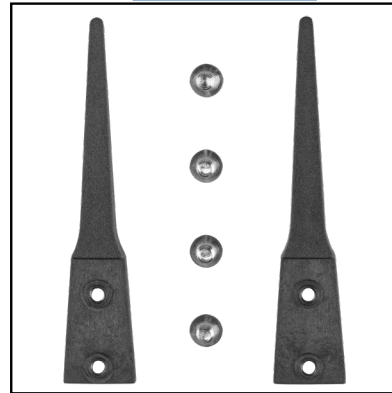

### Tip Specifications:

Test	Norm	Unit	Value
Density	ISO 1183	g/cm <sup>3</sup>	1,28
Tensile strength	ISO 527	MPa	210
Elongation at break	ISO 527	%	2,5
Flexural Modulus	ISO 527	MPa	17000
Heat distribution Temperature	ASTM D 648	°C	95°
Melting point	ASTM D1525	°C	>260°
Charpy impact strength	DIN 53453	kJ/m <sup>2</sup>	30

Unless otherwise noted, tolerance is ±10%.

Specifications and procedures subject to change without notice.

**PRECISION STAINLESS STEEL TWEEZER W/ REPLACEABLE  
CARBON FIBER TIPS, SLIGHT TAPER TIP, BLUNT, STYLE 2A**

# TRONEX

**DRAWING  
NUMBER**  
2A-CB-SA-CH

**DATE**  
June  
2023